


日鐵セメント株式會社 ASR投入施設活用率

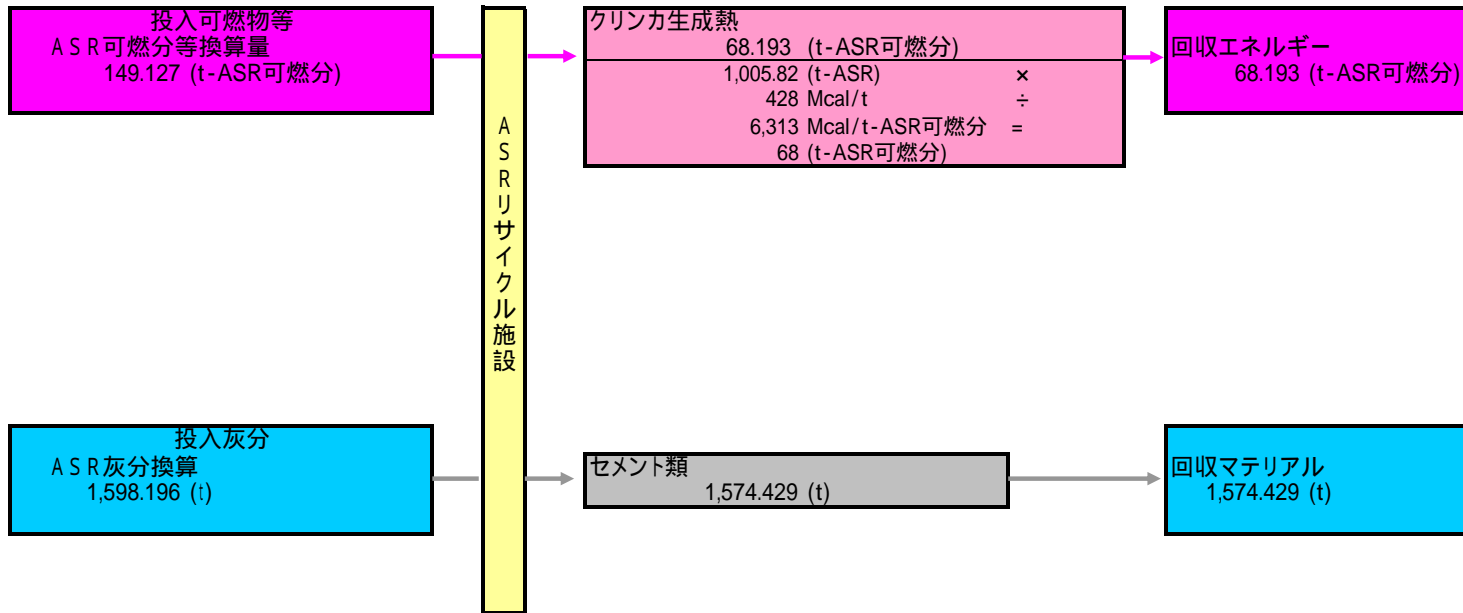

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">投入可燃分等</td> <td style="text-align: right; padding: 2px;">149 (t-ASR可燃分)</td> </tr> <tr> <td style="padding: 2px;">+投入灰分</td> <td style="text-align: right; padding: 2px;">1,598 (t)</td> </tr> <tr> <td style="padding: 2px;">投入計</td> <td style="text-align: right; padding: 2px;">1,747 (t)</td> </tr> </table>	投入可燃分等	149 (t-ASR可燃分)	+投入灰分	1,598 (t)	投入計	1,747 (t)	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">回収エネルギー</td> <td style="text-align: right; padding: 2px;">68 (t-ASR可燃分)</td> </tr> <tr> <td style="padding: 2px;">+回収マテリアル</td> <td style="text-align: right; padding: 2px;">1,574 (t)</td> </tr> <tr> <td style="padding: 2px;">回収計</td> <td style="text-align: right; padding: 2px;">1,643 (t)</td> </tr> </table>	回収エネルギー	68 (t-ASR可燃分)	+回収マテリアル	1,574 (t)	回収計	1,643 (t)
投入可燃分等	149 (t-ASR可燃分)												
+投入灰分	1,598 (t)												
投入計	1,747 (t)												
回収エネルギー	68 (t-ASR可燃分)												
+回収マテリアル	1,574 (t)												
回収計	1,643 (t)												
<table border="1" style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 5px;">回収計</td> <td style="text-align: right; padding: 5px;">1,643 (t)</td> </tr> <tr> <td style="padding: 5px;">÷ 投入計</td> <td style="text-align: right; padding: 5px;">1,747 (t)</td> </tr> <tr> <td style="padding: 5px;">ASR投入施設活用率</td> <td style="text-align: right; padding: 5px;">0.94</td> </tr> </table>		回収計	1,643 (t)	÷ 投入計	1,747 (t)	ASR投入施設活用率	0.94						
回収計	1,643 (t)												
÷ 投入計	1,747 (t)												
ASR投入施設活用率	0.94												